

Kompact / design your staircase

IS ADJUSTABLE IN RISE,
GOING AND ROTATION

KOMPACT comprises 12 treads with steel supports and a railing on one side. The different arrangement of the 12 treads (13 rises) and the choice of going, **KOMPACT 74** from 18 to 22 cm, or **KOMPACT 89** from 22 to 26 cm, allow the creation of 156 different configurations.


The plans indicate the maximum and minimum dimensions of all the configurations which are possible with **KOMPACT I** straight, **KOMPACT L** at 1/4 of a turn and **KOMPACT U** at 2/4 of a turn. **KOMPACT** is adjustable in rise, going and rotation. The **sense of direction** of the staircase can be clockwise or anti-clockwise.

Is there an existing opening?

Amongst the 156 plans, find one which is smaller than the dimensions of the opening in the floor. Keep in mind that the floor aperture must be at least as wide as the staircase minus two treads (Diagram 1).

Do you still have to make the opening?

Identify amongst the 156 plans the one which is best suited to your stairwell: the opening in the floor must be at least as wide as the chosen plan minus two treads (Diagram 1).



KOMPACT L



KOMPACT U


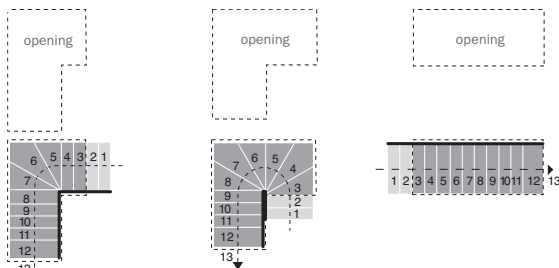


Diagram 1



Legend



rise (R)



going (G)




clockwise rotation




anticlockwise rotation



clear width (W)



Kompakt 74




Kompakt 89

Kompakt 74

R from 17 to 23,5 cm

G from 18 to 22 cm

W from 70,5 to 74,5 cm





with supplementary railing

Kompakt 89

R from 17 to 23,5 cm

G from 22 to 26 cm

W from 86,5 to 90,5 cm



with supplementary railing

**Design
your staircase
online.**



WITH THE STAIRPLANNER YOU WILL IMMEDIATELY BE ABLE TO FIND THE BEST KOMPACT FOR YOUR HOME.

FOR FURTHER INFORMATION VISIT THE WEBSITE
www.fontanotstaircases.co.uk

Kompact / technical data sheet

Kompact is composed of 12 treads with 13 rises and a railing on one side. The treads, complete with railing, are 74 cm or 89 cm wide. Kompact has three configurations:

- I-shaped straight
- L-shaped with 1/4 of a turn
- U-shaped with 2/4 of a turn.

Kompact is adjustable in rise, going and rotation.

WOOD SHADES **STEEL COLOURS**
 LIGHT GREY,
 OR DARK WHITE OR BLACK



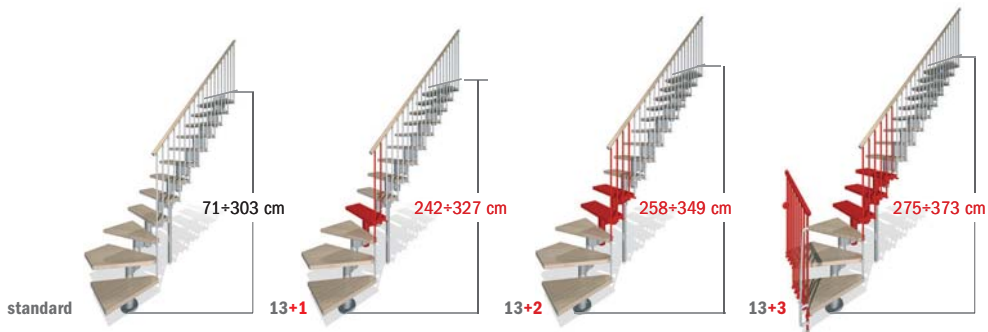


Table 1

				SUPPLEMENTARY ITEMS
	STAIRCASE HEIGHT IN CM	TREADS	RISES	TREADS
INCREASE	from 275 to 373	15	16	+ 3
	from 258 to 349	14	15	+ 2
	from 242 to 327	13	14	+ 1
STANDARD	from 225 to 303	12	13	12 SOLID WOOD TREADS + STEEL SUPPORTS + ONE RAILING SIDE WITH VERTICAL BALUSTERS
DECREASE	from 208 to 279	11	12	-
	from 191 to 255	10	11	-



RISE ADJUSTABLE FROM 17 TO 23.5 CM

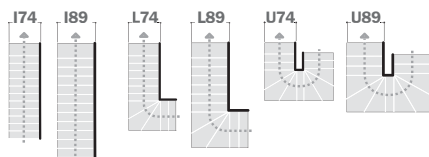

SUPPLEMENTARY ITEMS OVERVIEW



ROTATION

The direction of rotation, whether clockwise or anti-clockwise, can be decided during installation.



clockwise



anti-clockwise

SUPPLEMENTARY RAILING

It protects the second side of the staircase when it is far from the wall. It is a module composed of 5 balusters, handrail and fixings. The railing increases the dimension of the staircase by 4 cm.

In diagrams 2 and 3 you can count the number of balusters necessary on the second side of the staircase (the balusters are represented by numbers and dots). Example: if you wish to apply the supplementary railing only on the left side of the KOMPACT 74 staircase, as in diagram 2, you will need to add up the quantity of balusters: $3 + 4 + 2 = 9$ and therefore order 2 supplementary railing modules.




Diagram 2
KOMPACT 74




Diagram 3
KOMPACT 89

SUPPLEMENTARY BALUSTRADE

It allows the protection of the upper-floor aperture. It is a 120 cm module, composed of 10 balusters, handrail and fixings.

SUPPLEMENTARY TREADS

To reach a staircase height of 373 cm, you must purchase one or more supplementary treads comprising the structure, tread and balusters (Table 1).

RISER BAR

Allows to reduce the space between treads to prevent children from falling.



CHILD PROTECTION GATE

Kalypto is a safety accessory to prevent children under the age of 24 months from climbing up and down the stairs on their own. It is made up of a sheet stretched over a rigid tubular frame and plastic joints to fasten the gate to the railing. It is 82 cm long and 73.5 cm high and can be shortened down to 54 cm to adapt to the staircase dimensions. Suitable for indoor use.

*www.fontanotstaircases.co.uk/01k

EXAMPLE

If you wish to purchase KOMPACT 74L comprising $13 + 3 = 16$ rises with supplementary railing (see adjacent drawing), the following items are needed:

- 1 KOMPACT STAIRCASE 74L (standard)
- 3 SUPPLEMENTARY TREADS
- 2 SUPPLEMENTARY RAILINGS




FOR FURTHER INFORMATION
VISIT THE WEBSITE
www.fontanotstaircases.co.uk











Kompact 74









Kompact 74I




Kompact 74L



Kompact 74U




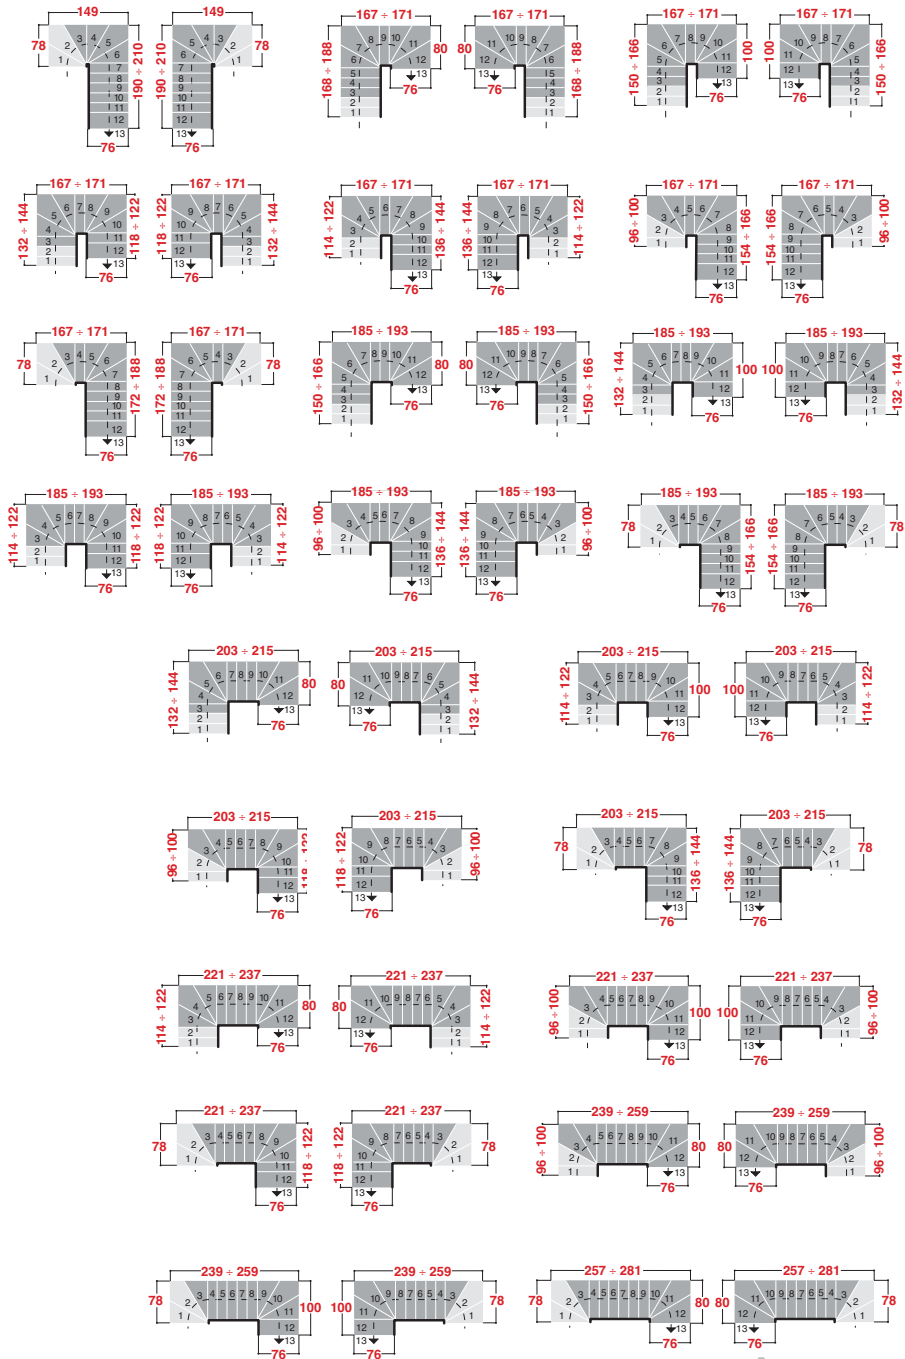


Kompact 89



Kompact 89I



Kompact 89L

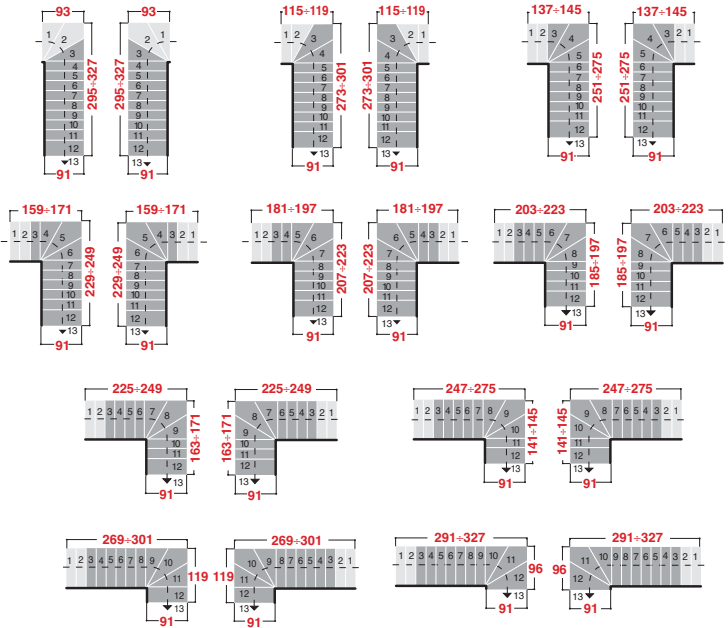

Kompact 89U

