




## Kompact

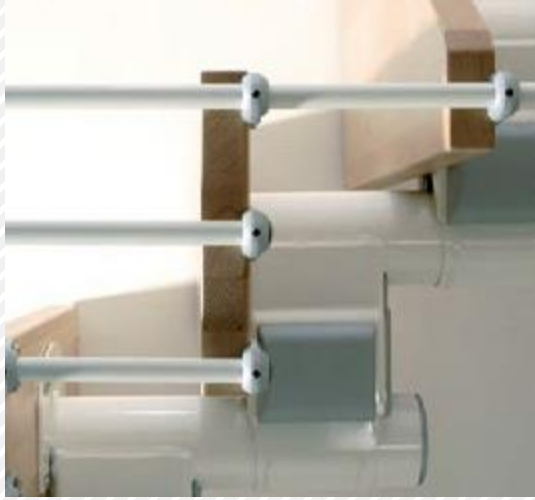

**KOMPACT** is the only staircase in the world which is patented and adjustable in rise, going, and rotation during installation.

Along with the maximum adaptability to the stairwell, this allows rectilinear configurations with one or two corners. The treads and the handrail are in light (natural) or dark tinted solid beech.

The steel parts are painted black, white or grey.

Finishes are black for the black staircase and grey for the grey or white staircases.

STAIRCASES WIDTH: 74 - 89 cm

MIN. HEIGHT 191 cm

MAX. HEIGHT 373 cm

WOOD SHADES



STEEL COLOURS



[www.fontanotstaircases.co.uk](http://www.fontanotstaircases.co.uk)

# Kompact / design your staircase

IS ADJUSTABLE IN RISE,  
GOING AND ROTATION

**KOMPACT** comprises 12 treads with steel supports and a railing on one side. The different arrangement of the 12 treads (13 rises) and the choice of going, **KOMPACT 74** from 18 to 22 cm, or **KOMPACT 89** from 22 to 26 cm, allow the creation of 156 different configurations.

The plans indicate the maximum and minimum dimensions of all the configurations which are possible with **KOMPACT I** straight, **KOMPACT L** at 1/4 of a turn and **KOMPACT U** at 2/4 of a turn. **KOMPACT** is adjustable in rise, going and rotation. The **sense of direction** of the staircase can be clockwise or anti-clockwise.

## Is there an existing opening?

Amongst the 156 plans, find one which is smaller than the dimensions of the opening in the floor. Keep in mind that the floor aperture must be at least as wide as the staircase minus two treads (Diagram 1).

## Do you still have to make the opening?

Identify amongst the 156 plans the one which is best suited to your stairwell: the opening in the floor must be at least as wide as the chosen plan minus two treads (Diagram 1).

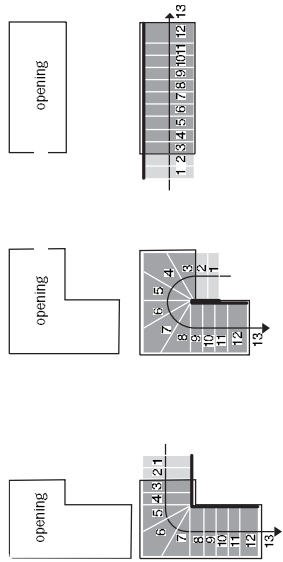



Diagram 1



KOMPACT L



KOMPACT U



## Legend



rise (R)



clockwise rotation




clear width (W)




going (G)




anticlockwise rotation



Kompact 74



Kompact 89



## Kompact 74

R from 17 to 23,5 cm

G from 18 to 22 cm

W from 70,5 to 74,5 cm

with supplementary railing



## Kompact 89

R from 17 to 23,5 cm

G from 22 to 26 cm

W from 86,5 to 90,5 cm

with supplementary railing



**Design  
your staircase  
online.**

WITH THE STAIRPLANNER YOU WILL IMMEDIATELY BE ABLE TO FIND THE BEST KOMPACT FOR YOUR HOME. FOR FURTHER INFORMATION VISIT THE WEBSITE [www.fontanotstaircases.co.uk](http://www.fontanotstaircases.co.uk)

# Kompact / technical data sheet

Kompact is composed of 12 treads with 13 risers and a railing on one side. The treads, complete with railing, are 74 cm or 89 cm wide. Kompact has three configurations:

- L-shaped straight
- U-shaped with 1/4 of a turn.
- U-shaped with 2/4 of a turn.

Kompact is adjustable in rise, going and rotation.


Table 1

	SUPPLEMENTARY ITEMS		
	TREADS	RISES	TREADS
INCREASE	15	16	+ 3
	from 275 to 373		
	14	15	+ 2
	from 258 to 349		
	13	14	+ 1
	from 242 to 327		
STANDARD	12	13	12 SOLID WOOD TREADS + STEEL SUPPORTS + ONE RAILING SIDE WITH VERTICAL BALUSTERS
	from 225 to 303		
DECREASE	11	12	-
	from 208 to 279		
	10	11	-
	from 191 to 255		

**WOOD SHADES** LIGHT OR DARK  
**STEEL COLOURS** GREY, WHITE OR BLACK



## SUPPLEMENTARY ITEMS OVERVIEW

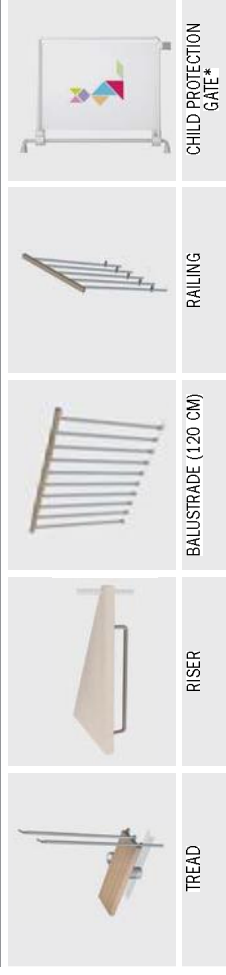

### ROTATION

The direction of rotation, whether clockwise or anti-clockwise, can be decided during installation.



**clockwise**



**anti-clockwise**

### SUPPLEMENTARY BALUSTRADE

It allows the protection of the upper-floor aperture. It is a 120 cm module, composed of 10 balusters, handrail and fixings.

### SUPPLEMENTARY TREADS

To reach a staircase height of 373 cm, you must purchase one or more supplementary treads comprising the structure, tread and balusters (Table 1).

### RISER BAR

Allows to reduce the space between treads to prevent children from falling.





### CHILD PROTECTION GATE

Kalypto is a safety accessory to prevent children under the age of 24 months from climbing up and down the stairs on their own. It is made up of a sheet stretched over a rigid tubular frame and plastic joints to fasten the gate to the railing. It is 82 cm long and 73.5 cm high and can be shortened down to 54 cm to adapt to the staircase dimensions. Suitable for indoor use.

\*www.fontanotstaircases.co.uk/01k



RISE ADJUSTABLE FROM 17 TO 23.5 CM

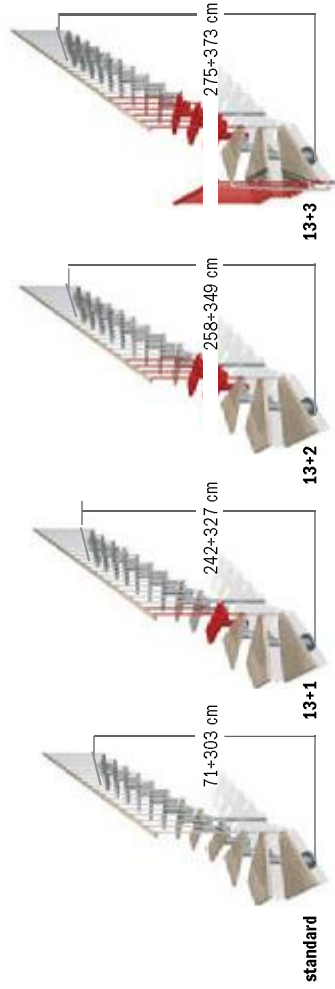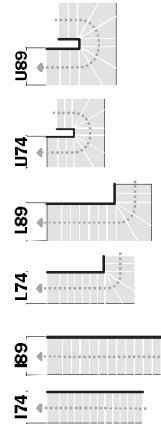

### EXAMPLE

If you wish to purchase KOMPACT 74L comprising 13 + 3 = 16 risers with supplementary railing (see adjacent drawing), the following items are needed:

- 1 KOMPACT STAIRCASE 74L (standard)
- 3 SUPPLEMENTARY TREADS
- 2 SUPPLEMENTARY RAILINGS



FOR FURTHER INFORMATION VISIT THE WEBSITE [www.fontanotstaircases.co.uk](http://www.fontanotstaircases.co.uk)