

Komoda



STAIRCASES WIDTH: 74 - 89 cm

MIN. HEIGHT 191 cm

MAX. HEIGHT 373 cm

WOOD SHADES



STEEL COLOURS



www.fontanotstaircases.co.uk

KOMODA is adjustable in rise, going and rotation during the installation.

This allows, along with the maximum adaptability to the stairwell, rectilinear configurations with one or two corners. The treads and the handrail are in light (natural) or dark tinted solid beech. The metal parts are painted black, white or grey. Finishes are black for the black staircase and grey for the grey or white staircases.

The railing is made up of powder coated steel balusters and stainless steel cables running parallel to the handrail.



arhè

Komoda / design your staircase

IS ADJUSTABLE IN RISE,
GOING AND ROTATION

KOMODA comprises 12 treads with steel supports and a railing on one side. The different arrangement of the 12 treads (13 rises) and the choice of going, **KOMODA 74** from 18 to 22 cm, or **KOMODA 89** from 22 to 26 cm, allow the creation of 156 different configurations.

The plans indicate the maximum and minimum dimensions of all the configurations which are possible with **KOMODA I** straight, **KOMODA L** at 1/4 of a turn and **KOMODA U** at 2/4 of a turn. **KOMODA** is adjustable in rise, going and rotation.

The **sense of direction** of the staircase can be clockwise or anti-clockwise.

Is there an existing opening?

Amongst the 156 plans, find one which is smaller than the dimensions of the opening in the floor. Keep in mind that the floor aperture must be at least as wide as the staircase minus two treads (Diagram 1).

Do you still have to make the opening?

Identify amongst the 156 plans the one which is best suited to your stairwell: the opening in the floor must be at least as wide as the chosen plan minus two treads (Diagram 1).

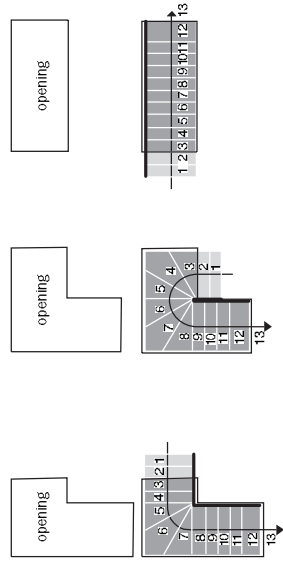



Diagram 1




KOMODA L




KOMODA U




Legend



Komoda 74



Komoda 89



Komoda 74

R from 17 to 23,5 cm

G from 18 to 22 cm

W from 70,5 to 74,5 cm

with supplementary railing



Komoda 89

R from 17 to 23,5 cm

G from 22 to 26 cm

W from 86,5 to 90,5 cm

with supplementary railing



**Design
your staircase
online.**

WITH THE STAIRPLANNER YOU WILL
IMMEDIATELY BE ABLE TO FIND THE BEST
KOMODA YOUR HOME.
FOR FURTHER INFORMATION
VISIT THE WEBSITE
www.fontanotstaircases.co.uk

Komoda / technical data sheet

Komoda is composed of 12 treads with 13 rises and a railing on one side. The treads, complete with railing, are 74 cm or 89 cm wide. Komoda has three configurations:

- I-shaped straight
- L-shaped with 1/4 of a turn
- U-shaped with 2/4 of a turn.

Komoda is adjustable in rise, going and rotation.

table 1


SUPPLEMENTARY ITEMS		STAIRCASE HEIGHT IN CM	TREADS	RISES	TREADS
INCREASE		from 275 to 373	15	16	+ 3
		from 258 to 349	14	15	+ 2
		from 242 to 327	13	14	+ 1
STANDARD		from 225 to 303	12	13	12 SOLID WOOD TREADS + STEEL SUPPORTS + ONE RAILING SIDE WITH STAINLESS STEEL CABLES
DECREASE		from 208 to 279	11	12	-
		from 191 to 255	10	11	-

WOOD SHADES
LIGHT OR DARK



STEEL COLOURS
GREY,
WHITE OR BLACK

SUPPLEMENTARY ITEMS OVERVIEW

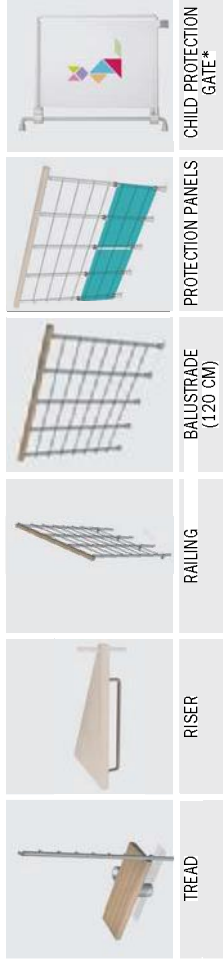

ROTATION

The direction of rotation, whether clockwise or anti-clockwise, can be decided during installation.



clockwise



anti-clockwise

SUPPLEMENTARY BALUSTRADE

It allows the protection of the upper-floor aperture. It is a 120 cm module, composed of 5 balusters, cables, handrail and fixings.

SUPPLEMENTARY TREADS

To reach a staircase height of 373 cm, you must purchase one or more supplementary treads comprising the structure, tread and baluster (Table 1).

RISER BAR



Allows to reduce the space between treads to prevent children from falling.



SUPPLEMENTARY RAILING

It protects the second side of the staircase when it is far from the wall. It is a module composed of 4 balusters, cable, handrail and fixings. The railing increases the dimension of the staircase by 4 cm. In diagrams 5 and 6 you can count the number of balusters necessary on the second side of the staircase (the balusters are represented by numbers and dots).

Example: if you wish to apply the supplementary railing only on the left side of the Komoda 74 staircase, as in diagram 5, you will need to add up the quantity of balusters: 1 + 1 + 2 = 4 and therefore order 1 supplementary railing module.



EXAMPLE



If you wish to purchase KOMODA 74L comprising 13 + 3 = 16 risers with supplementary railing (see adjacent drawing), the following items are needed:

- 1 KOMODA 74L STAIRCASE (standard)
- 3 SUPPLEMENTARY TREADS
- 1 SUPPLEMENTARY RAILING



FOR FURTHER INFORMATION
VISIT THE WEBSITE
www.fontanotstaircases.co.uk

RISE ADJUSTABLE FROM 17 TO 23.5 CM

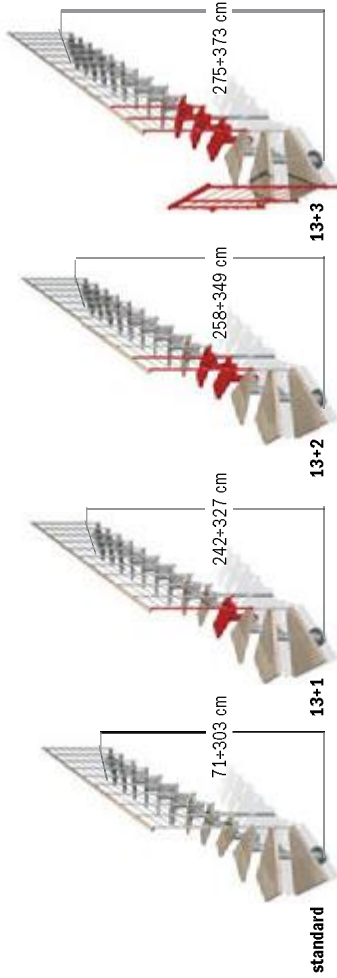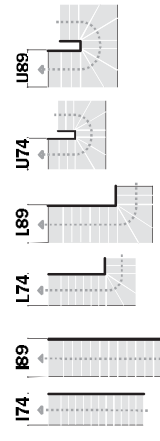

CHILD PROTECTION GATE

Kalypto is a safety accessory to prevent children under the age of 24 months from climbing up and down the stairs on their own. It is made up of a sheet stretched over a rigid tubular frame and plastic joints to fasten the gate to the railing. It is 82 cm long and 73.5 cm high and can be shortened down to 54 cm to adapt to the staircase dimensions. Suitable for indoor use.

*www.fontanotstaircases.co.uk/01k